



WHAT IT'S FOR

- ✓ It saturates open pores in the material
- ✓ It protects from underfoot dirt (anti footprints).
- ✓ It protects the material from common stains.
- ✓ It makes subsequent cleaning easier.
- ✓ It ensures resistant sheen with anti-dirt effect.
- ✓ It is resistant to acid cleaning and makes cleaning after installation easier.
- ✓ It considerably increases the gloss of the material.



ADVANTAGES

- Water-based product.
- Non film-forming product.
- Resistant to deterioration caused by UV rays and does not yellow (ASTM G154).
- VOC free
- It considerably increases the gloss
- Resistant to chemicals (UNI EN ISO 10545-13).
- Easy to use
- Any product residues are easy to remove, even after a while and on installed material.



CERTIFICAZIONI

- ✓ The product is labelled class A+ (Decreto no. 2011-321 of 23 March 2011).
- ✓ The product does not contain heavy metals.
- ✓ The product is suitable for contact with foodstuffs (Italian Ministerial Decree 22.03.73)

Composition: Mixture of inorganic polymers.



MATERIALS

▶ LAPPATO AND POLISHED PORCELAIN TILES



HOW TO USE


Dilution. The product does not need diluting as it is ready for use.

Application. For the protection of lappato and polished porcelain tiles. After sanding, it is always preferable to clean with an acid-based product and then rinse with a product such as **FILAFT DEK20**. This wash enhances the performance of protectors. After washing, dry the surface of the porcelain tiles with the conveyor dryers to remove rinsing water. **FILAFT1239 GLOSSY 01** should be applied to the satellite heads of machines with SuperShine or similar technology, using a total amount of 170 g/m² distributed over all the heads fitted with specific tools. If necessary, carry out a rinsing wash with the last satellite heads on the machine.

How much to use. The product has a coverage of about 170 g/m² depending on the type and characteristics of the material.

Operations after installation. See www.filasolutions.com, ceramic section.

Shelf life: 1 year for sealed product stored indoors at a temperature of 5-35°C (40-95°F).

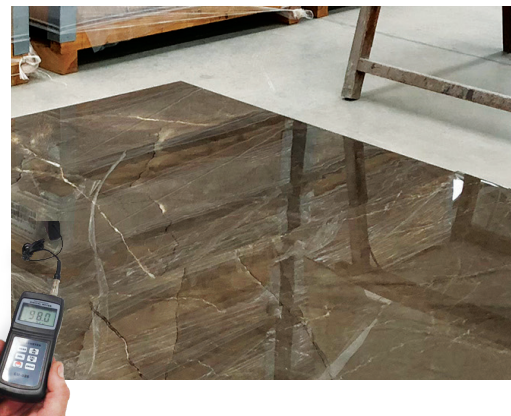

OPERATORS AND SYSTEMS

- At the end of the day, it is a good idea to wash the application station with water to remove any product residues.

We recommend keeping the machine always clean and efficient.

Sizes: 1,000 litre cubes.

Chemical-physical characteristics



- Appearance: liquid
- Odour: odourless
- Density: 1.4 kg/l
- pH: 9.0 - 11
- Storage temperature: from 5° to 35°C (40-95°F)
- Application temperature: from 5° to 30°C
- Maximum temperature of the surface to be treated: 45°C
- Not flammable (flammability: >60°C)
- Product not classified as hazardous for transport

Safety warnings



The product is not classified as hazardous under the provisions of CLP Regulation (EC) 1272/2008 (as amended).
Safety data sheet available on request.
Contains: 1,2-benzisothiazol-3 (2H) -one.
It may cause an allergic reaction.

The information above reflects our latest technical know-how and is the outcome of ongoing laboratory research and testing. However, some factors are beyond our control. It is essential to integrate our suggestions with your own on-site preliminary tests and checks. Fila accepts no liability for improper use of its product.