



WHAT IT'S FOR

- ✓ Water-based water- and oil-repellent stain protector.



ADVANTAGES

- Non-film forming penetrating product.
- UV resistant (lamp according to ASTM G154).
- Does not yellow.
- Does not alter the material's appearance.
- It does not alter substantially the coefficient of friction of the surface.
- Suitable for indoors and outdoors.
- Reduces surface absorption of common watery and oily staining substances.
- Protective treatment with breathable effect.
- Does not alter the gloss of the material.
- Waterproofs, protects and simplifies cleaning.

Composition: Water-dispersed organic resins.



MATERIALS

- NATURAL STONE
- MARBLE
- GRANITE
- AGGLOMERATES
- POLISHED, GLOSSY LAPPATO PORCELAIN TILES
- CONCRETE



HOW TO USE IT

No dilution required: ready to use. The product does not need diluting, it is ready for use.


Application. To protect low absorbent materials: after polishing, first send the material through a conveyor dryer to remove polishing water and any residues from the surface. Apply **FILAFT 576 UP** using roller, drop or airless method, spreading evenly over the entire surface with a rotating soft-bristle brush. Remove any excess product with one or two rotating brushes. To protect highly absorbent materials, apply **FILAFT 576 UP** using the airless method and then work in with rotating brushes.

How much to use. Coverage will depend on: the type of material, application method and temperature of the material when the product is applied.

Operations after installation. Initial cleaning: **CLEANER PRO** or **PS87 PRO**. Protectors: **FOB XTREME** or **MP90** for a natural effect, **STONEPLUS** for a colour-enhancing effect.

Warning: At the end of the work session, flush the system with running water.

Shelf life: 2 years for sealed product stored indoors according to the indications given.

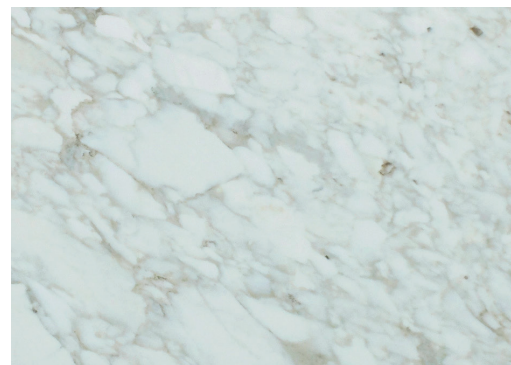

OPERATORS AND SYSTEMS

An aspiration system is required.

Hydrocarbon solvent free: water-based treatment.

Activities involving widespread dispersion that may lead to extensive aerosol emissions (e.g. spray application and/or airless system) are reserved for **PROFESSIONAL USE ONLY**.

Take the following further protective measures: use an approved positive pressure supplied-air respirator. Supplied-air respirators, fitted with a discharge bottle, may be appropriate when oxygen levels are insufficient, if the gas/vapour risks are low or if the capacity/values of the air purification filters may be exceeded. For high airborne concentrations, also use waterproof clothing to protect the skin and face protection.

Formats: 100 litre cans 1000 litre cubes.

Chemical-physical characteristics



- Appearance: pale yellow liquid
- Odour: characteristic
- Density: 1.012 kg/l
- Not flammable (flash point: >60°C)
- pH: 9.2
- Storage temperature: from 5° to 30°C
- Application temperature: from 10° to 30°C
- Maximum temperature of the surface to be treated: 40°C
- Not dangerous for transport

Safety warnings



NON-HAZARDOUS PRODUCT.

Safety info sheet available on request CONTAINS:
BENZISOTHIAZOL-3 (2H) -ONE
May produce an allergic reaction.